

2K Video Wall Controller 6output Product Specification



Model: RDTV2K-06

I. Product Overview

The 2K TV Video Wall Controller supports a maximum resolution of 1920x1080@60Hz HDMI 4:4:4 input and is compatible with HDCP 1.4. It supports routing any input to 6 HDMI outputs. Users can select different video wall modes via the remote control or panel buttons, such as 2×3 video wall mode. It also supports landscape video wall mode.

This 2K TV video wall controller provides a solution for home, office, digital entertainment, conference rooms, schools, KTV, and other audio-visual applications.

II. Features

1. This product is a high-definition video wall processor specifically designed for LCD TVs, ultra-narrow bezel LCD screens, and projectors. It supports 6 video inputs and can be connected to LCD TVs or other display devices to customize various video wall modes according to user requirements.

2. The product supports cascading, enabling up to 255-channel signal output.

3. The product uses a high-definition processing chip, supporting 1080P signal input and output.

4. The product is equipped with infrared remote control and front panel buttons, allowing users to perform one-touch quick control and full-function control via buttons or remote control, offering a simple and

convenient experience. It can also be controlled via RS-232 for central control and further functional expansion.

5. The product supports 1 VGA input, 1 DVI input, 1 USB input, and 1 HDMI input. All input signals can be switched to the large screen for display.

6. Supports audio input and output, and enables synchronized audio output with the corresponding video.

7. Supports 180-degree rotation of any video wall screen.

8. The product features built-in scrolling subtitle functionality, allowing users to adjust subtitle position, scrolling speed, font size, text color, and background color via the RS-232 communication interface using the included control software.

9. The product features built-in image zoom and cropping functionality, allowing users to zoom in, zoom out, and crop the large screen image using the built-in control software or remote control menu.

10. Supports border elimination technology. Without border elimination, the image may appear visually stretched. After border elimination, the image remains distortion-free, stretched, and visually natural and realistic.

11. Supports USB connectivity; simply insert a USB drive to directly decode and play videos, images, MP3 files, documents, etc. No

additional front-end devices are required, making it simple and practical.


12. Supports remote control operation via an infrared remote control, enabling all settings, switching, and adjustment functions of the video wall processor; the remote control features ultra-sensitive design with a control range of 7 to 10 meters.

III. Technical Specifications

Category	Item	Technical Parameters
Input Signal	HDMI	HDMI 1.4 with embedded audio; Supports 640×480 to 1920×1080@60Hz
	DVI	DVI-I (24+5) interface; Supports 640×480 to 1920×1080@60Hz
	VGA	HD15 connector with integrated 3.5mm audio input; Supports 640×480 to 3840×2160@60Hz <i>(resolution depends on display/cable capability)</i>
	USB 2.0	Standard USB-A port; Decodes video/audio/images, plays TXT files; Supports playlist loop, pause, fast-forward
Output Signal	HDMI 1-6	Tiling modes: 1×1、3×2、2×3、1×5、1×6、5×1、6×1; Max output: 1920×1080@60Hz


Category	Item	Technical Parameters
Audio Output	3.5mm Jack	Stereo audio (L/R channels); Sync-switching with video
others	Power Supply	AC 110-220V (auto-sensing)
	Power Consumption	24W (typical)
	Tiling Mode	Quick Alignment Mode (<i>one-time configuration</i>)
	Control	Infrared remote, front panel buttons, RS-232
Physical Specs	Net Weight	2.7kg
	Gross Weight	3.6kg
	Dimensions	442×240×52mm (L×W×H)
Packaging	Box Size	515×315×105mm (L×W×H)
	Contents	1× Main unit, 1× Power cable, 1× Remote, 1× Warranty card, 1× adapter, 1× Software CD, 2× Mounting brackets, 8× Screws, 1× User manual.

IV. Product Dimensions

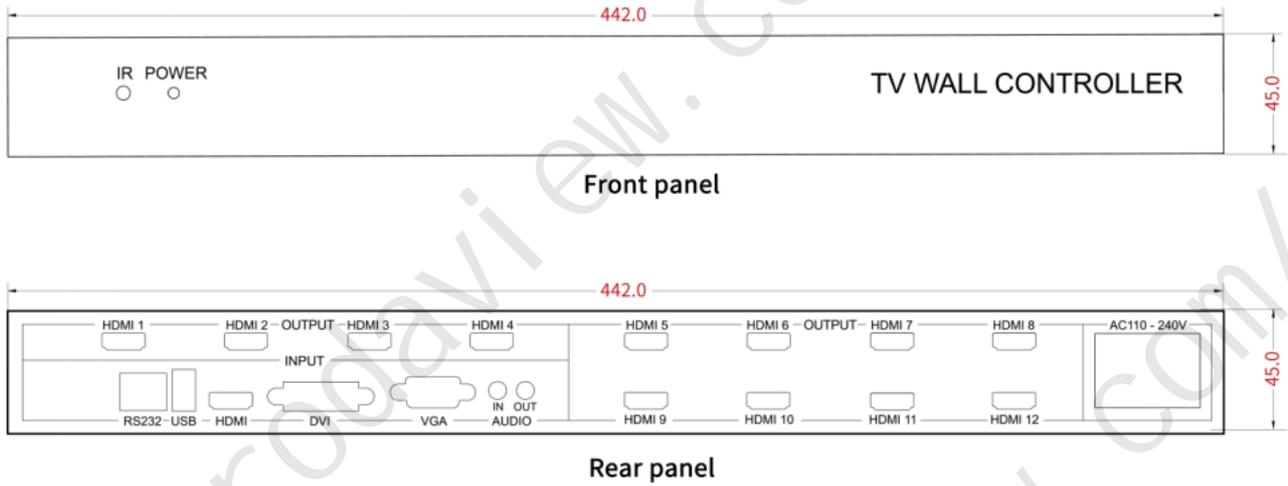


V. Panel Buttons and Port Description

1. Front Panel Button Functions

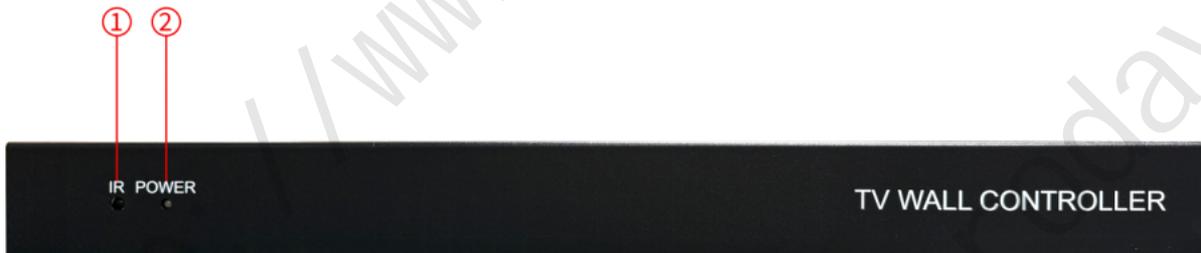

Serial Number	Button Name	Description
1	IR	Infrared receiver port
2	POWER	Power switch indicator light

2. Port Description

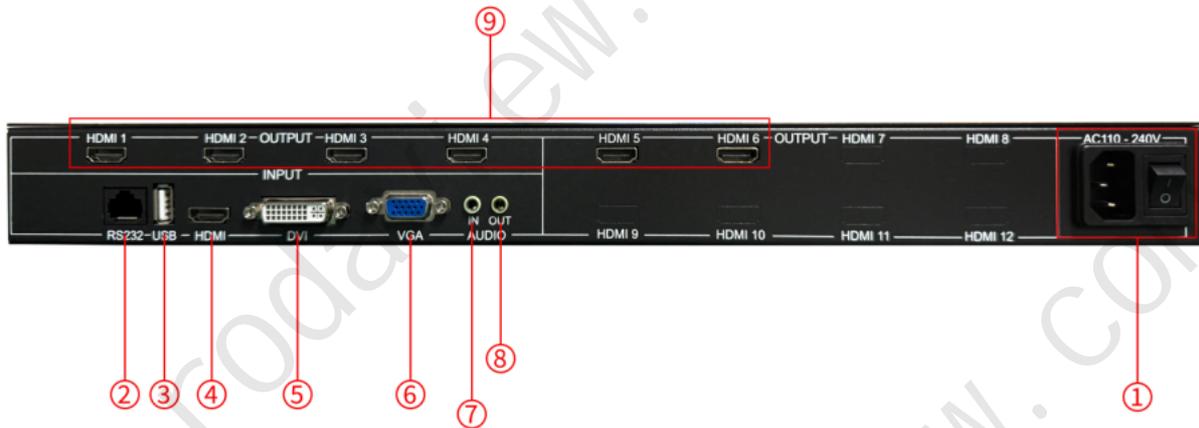


Section	No.	Interface	Description
INPUT	1	AC 110–220V	Power Input (Auto-sensing)
	2	RS-232	Serial Control Input
	3	USB	USB Host Port
	4	HDMI	HDMI Video/Audio Input (1080p@60Hz)
	5	DVI	DVI-D Digital Video Input
	6	VGA	VGA Analog Video Input
	7	AUDIO-IN	3.5mm Stereo Audio Input
OUTPUT	8	AUDIO-OUT	3.5mm Stereo Audio Output (Line-level)
	9	HDMI 1–6	HDMI Output Ports 1 to 6

VI.Remote Control Button Description

OFF	Power Off	
ON	Power On	
PC	PC Signal/Playback	
HDMI	HDMI Signal/Pause	
DVI	DVI Signal/Stop	
	Volume Down	
	Image Rotation	
	Volume Up	
SW/SP	Split / Merge	
INPUT	Switch Signal Source Menu	
←	Left menu options	
→	Right menu options	
↑	Up menu option	
↓	Down menu option	
OK	Confirm	
MENU	Menu options/Return to	
EXIT	Exit Options	
MUTE	Mute Option	
UPGRADE	Software Upgrade	

VII. Connection Diagram

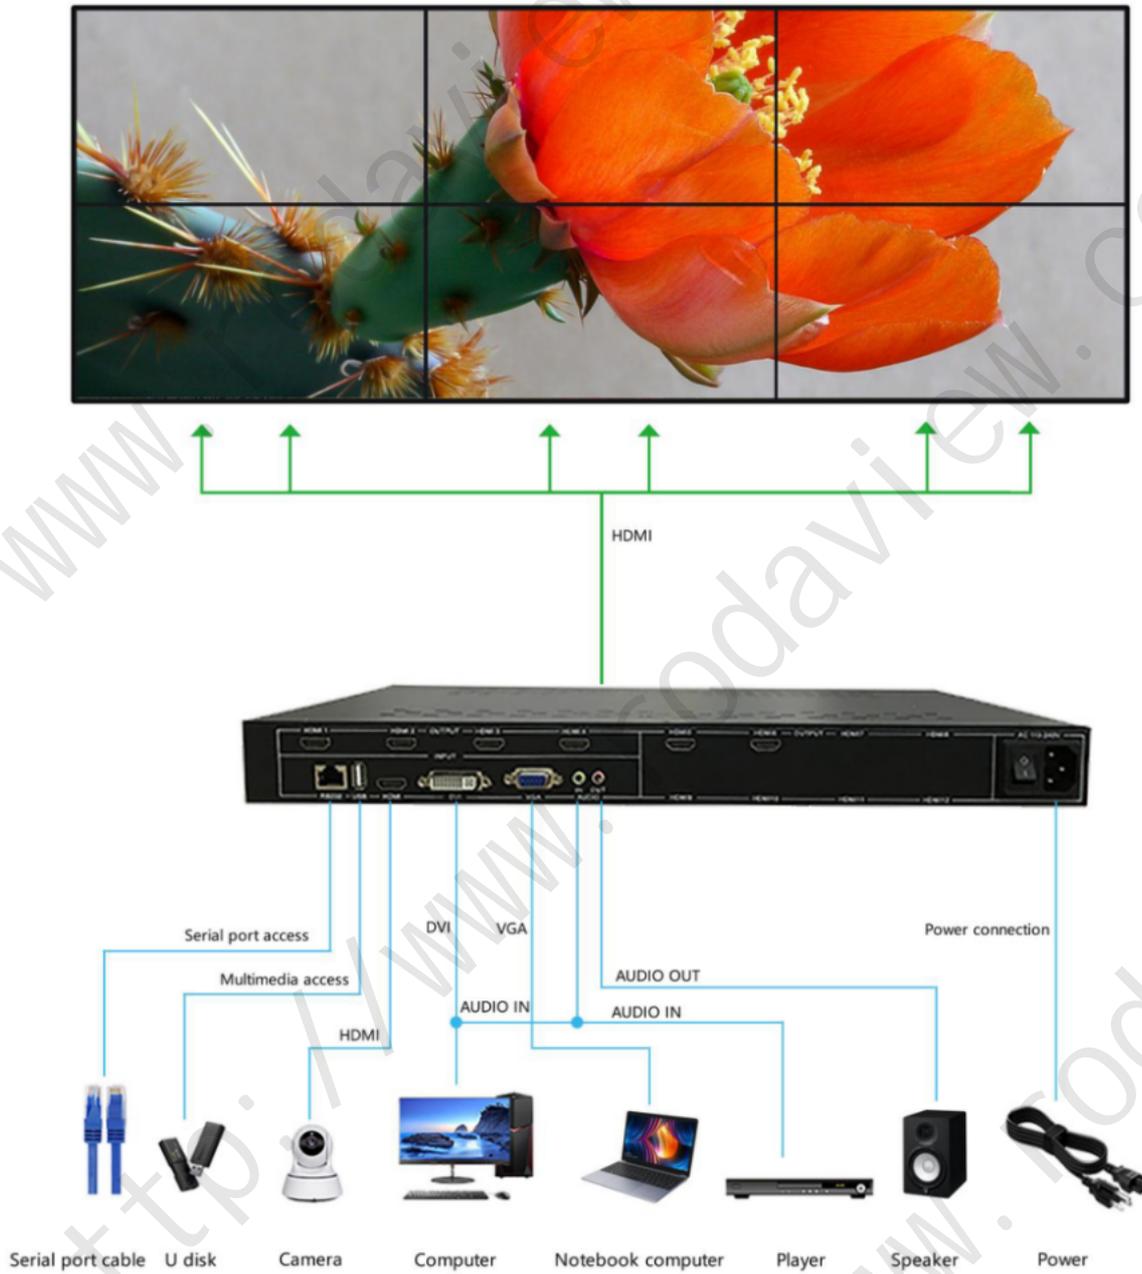

VIII. Splice Mode Preview



2x2



2x1



3x1



4x1



1x2




1x3



1x4




2x3

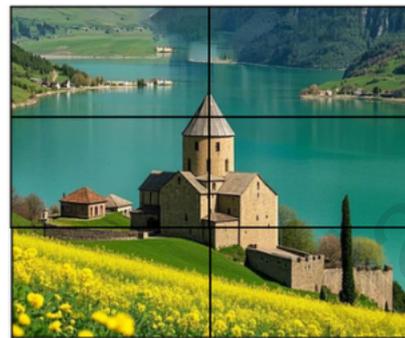

3x2

IX. Product Physical Diagram

Front View



Rear View



Left/Right View

